

Since 1982

TRADCO

Defining the Details

How to install a Turn Bell

1. Below two units are supplied with 7 screws.





Indoor Unit



Outdoor Unit

2. Install turn bell at your desired location.
3. Drill a D10mm hole passing through the door perpendicular to the door plane.
4. Measure your door thickness and add 25mm for the indoor bell unit. For example, if the door is 40mm thick, spindle needs to be cut to 65mm. Remove excess spindle length using your preferred method.

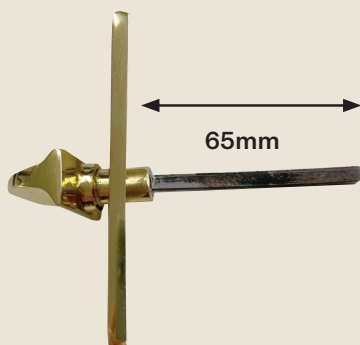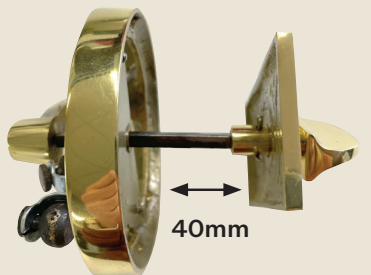

5. Undo the bell cup of the indoor unit unscrewing nut anticlockwise.



6. Insert spindle through the indoor unit. Ensure spindle is square and pre drill the 4 screw holes.



7. Install the outdoor unit after predrilling two screw holes.



8. Insert bell cup and tighten the nut (clockwise direction).



9. Turn the thumb turn and check if the bell rings. Turn indoor bell cup to obtain the desired tone and tighten the nut holding cup at this position. Use your preferred method to tighten the nut.